


CG 331 EPDM 70 DURO

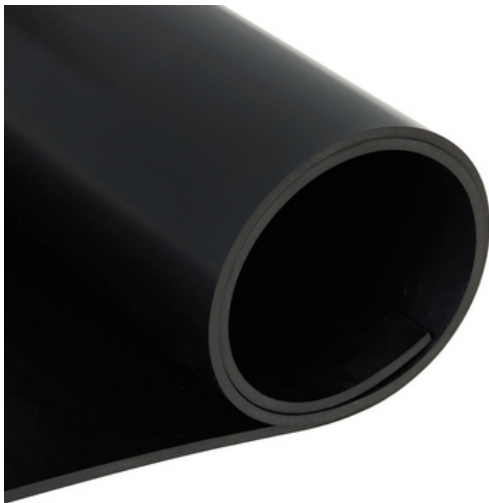


Product Info

Used in a wide variety of applications, EPDM black rubber (Ethylene Propylene Diene Monomer) is a type of high-density synthetic rubber used most commonly as a sealing material in the Marine, Construction, and Automotive industries due to its excellent resistance to environmental factors such as ozone, steam, weathering, and UV.

Performance

- CGLTD EPDM material has a working temperature range of -40 to +212°F (-40 to +100°C) and a shore “A” hardness of either 60 or 70 durometer.
- EPDM is suitable for outdoor applications as it has excellent water, heat, chemical and aging resistance, with general resistance to strong oxidizing chemicals and acetone.
- This material has poor resistance to oil, petroleum based fluids or any other similar solvents.

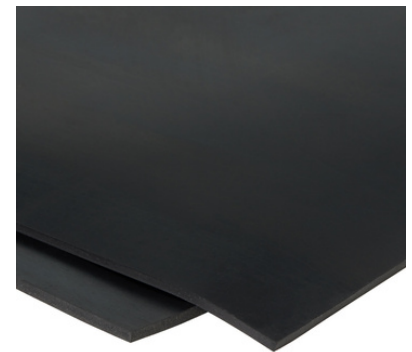

Technical Data

CG331 EPDM 70 Duro	Specification
Shore A hardness degrees	70±5°
Tensile strength	850 psi (≥6 MPa)
Elongation	300 %
Density	1.35±0.05
Temperature range	-40 to +212°F
Thickness (in stock)	0.040", 1/16", 3/32", 1/8", 3/16", 1/4", 3/8", 1/2"

**Disclaimer:
The information provided is based on vendor data and is believed to be accurate. However, Custom Gaskets Ltd. makes no express or implied guarantees regarding their accuracy, completeness, or reliability. The user is solely responsible for determining the suitability of this product for its intended use and ensuring compliance with all applicable laws and regulations.*

While most of the potential hazards are identified on the Safety Data Sheet (SDS), certain risks may not yet be identified. Custom Gaskets Ltd. shall not be held liable for direct, indirect, incidental, or consequential damages arising from the use of this information or any Custom Gaskets Ltd. products. Users are responsible for obtaining and implementing any updates or clarifications based on new information.