

CG 604 SBR Runner Matting




Product Info

SBR Wide-Ribbed Black Runner Matting adds a safe, protective layer to industrial and commercial flooring to reduce the risks of hazards such as slips and falls. It is a suitable floor cover for temporary use in workshop environments or for lining surfaces such as shelves or drawers. This material maintains cleanliness, safeguards underlying surfaces, and provides added cushioning.

Performance

- SBR Runner Matting has a shore “A” hardness of 65 durometer and a temperature range of -22 to +176°F (-30 to 80°C).
- Its design helps reduce hazards such as slips and falls, also provides added cushioning for improved comfort in industrial or commercial settings.
- Its medium hardness (65 Shore A) strikes a balance between flexibility and stability, making it suitable for workshop floors, shelves, or drawers.

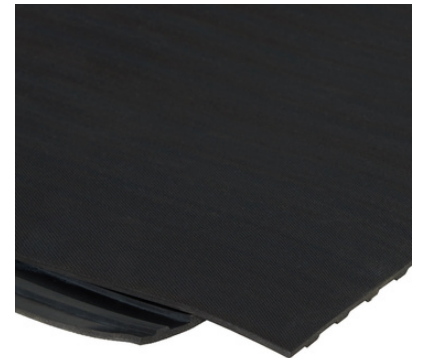

Technical Data

CG 604 SBR Runner Matting	Specification
Hardness "Shore A" (±5)	65 Durometer
Tensile strength	435 psi (≥3 MPa)
Elongation	≥200%
Density	1.5±0.05 cm ³
Temperature range	-22 to +176 °F (-30 to 80°C)
Thickness (in stock)	3/32", 1/8"

**Disclaimer:
The information provided is based on vendor data and is believed to be accurate. However, Custom Gaskets Ltd. makes no express or implied guarantees regarding their accuracy, completeness, or reliability. The user is solely responsible for determining the suitability of this product for its intended use and ensuring compliance with all applicable laws and regulations.*

While most of the potential hazards are identified on the Safety Data Sheet (SDS), certain risks may not yet be identified. Custom Gaskets Ltd. shall not be held liable for direct, indirect, incidental, or consequential damages arising from the use of this information or any Custom Gaskets Ltd. products. Users are responsible for obtaining and implementing any updates or clarifications based on new information.