




Standard Sheet Size		1500x2000 mm, 1500x4000mm, 1500x1500mm 1500x4500 mm, 1500x3000mm, 2000x3000 mm
Thickness		0.25 mm to 6.00 mm (For Non-Metallic Range) 0.80 mm to 6.00 mm (For Metallic Range)
Tolerance	Thickness	< 1mm = $\pm 0.10$ mm > 1mm = $\pm 10\%$
	Length	$\pm 50$ mm
	Width	$\pm 50$ mm

**Approval :-**

1. EN 13555 By AMTEC, GERMANY
  2. Liyod's Register approval for marine application
  3. SHELL TAT specification MESC SPE 85/300 BY AMTEC, GERMANY
  4. VDI Cuideline 2440 for Ta-Luft by AMTEC GERMANY
- The Material suitable as high grade sealing products .

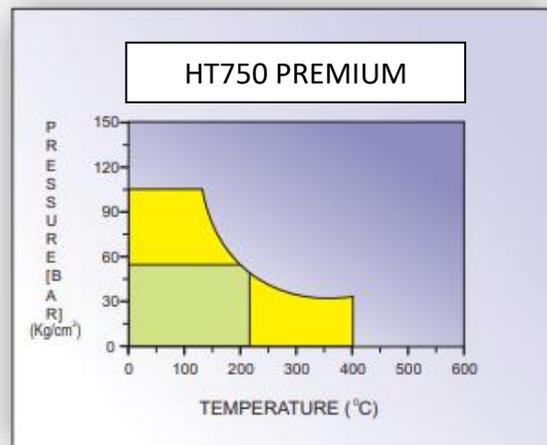

All data quoted above are based on years of experience in production & operation of sealing elements, in view of the wide variety of possible installation & operating conditions one can not draw final conclusion in all application cases regarding the behaviour in gasket joint. The data may not therefore, be used to support any warranty claims.

Should you have any doubts about the choice of gasket material, please refer to us. Our engineering cell will be happy to assist you.